

TO-247-3

SiC Power MOSFETs

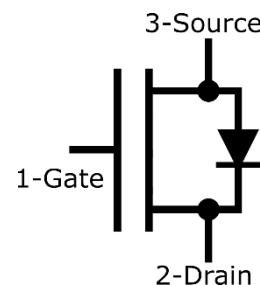
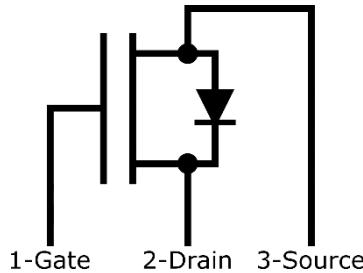
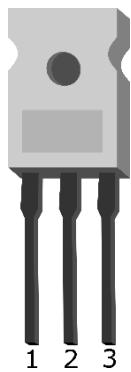
CoolCAD Power MOSFETs exceed power, efficiency and portability capabilities of standard silicon devices and are available in a variety of breakdown voltages (650V, 1200V, 1700V & 3300V) and current ratings. They have low on-resistance and low leakage in the blocking state. Fabricated on high-quality SiC epitaxial layers, our proprietary fabrication process includes carefully chosen annealing procedures to ensure a high-quality SiC-SiO₂ gate oxide dielectric layer. Doping profile, neck region, and edge termination ensure extremely low R_{on} and high breakdown voltage.

BENEFITS

- Higher efficiency
- Reduced cooling
- Increased power
- Reduced system volume

APPLICATIONS INCLUDE

Electromechanical power converters, DC to DC, AC to DC and DC to AC converters, switching power supplies, electric vehicles, hybrid vehicles, solar and wind energy power converters.



Part Number	Package	Marking
CC-T0-13-0522C	TO-247-3	CoolCADElectronics

* For description only. No rights are granted. No liability is assumed for choice of products.



contact@coolcadelectronics.com



College Park, Maryland



<https://coolcadelectronics.com>

Maximum Ratings						
*Characteristics	Symbol	Comments	Min	Typ	Max	Units
DC blocking voltage	VDSmax	TJ=25°C		650	15	V
Gate input voltage range	VGS	Recommended range Dynamic	-5 -5		18	V
Avalanche rating	VAVA	TJ=25°C		750		V
Pulsed drain current	IDpulsed	VGS=15V; TJ=25°C VGS=15V; TJ=175°C		15 10		A
Continuous drain current	ID	VGS=15V; TJ=25°C VGS=15V; TJ=175°C		10 7		A
Continuous drain power	P	VGS=15V; TJ=25°C		100		W
Maximum- junction temperature	TJmax	Normal operation During processing / soldering			175 250	°C

Electrical and Thermal Characteristics						
*Characteristics	Symbol	Comments	Min	Typ	Max	Units
Gate threshold voltage	V _{TH}	VGS=VDS; IDS=5mA; TJ=25°C VGS=VDS; IDS=5mA; TJ=175°C		2.5 1.5		V
Gate leakage	I _{GSS}	VGS=15V; VDS=0; TJ=25°C VGS=15V; VDS=0; TJ=175°C		17 5		pA
Drain leakage	I _{DSS}	VDS=600V; VGS=0; TJ=25°C VDS=600V; VGS=0; TJ=175°C		0.8 130		nA
Drain-source on-resistance	R _{DSON}	VGS=15V; IDS=5A; TJ=25°C VGS=15V; IDS=5A; TJ=175°C		124 179		mΩ
Transconductance	gm	VDS=10V; IDS=10A; TJ=25°C VDS=10V; IDS=10A; TJ=175°C		4.5 4.8		S
Input capacitance	C _{ISS}	VGS=0V; VDS=200V; f=1MHz; TJ=25°C		842		pF
Output capacitance	C _{OSS}	VGS=0V; VDS=200V; f=1MHz; TJ=25°C		147.5		pF
Reverse transfer capacitance	C _{rss}	VGS=0V; VDS=200V; f=1MHz; TJ=25°C		5		pF
Stored energy at output	E _{OSS}	VGS=-5/15V; VDS=200V; f=1MHz; TJ=25°C		6		μJ
Turn on switching energy	E _{ON}	VGS=-5/15V; VDS=200V; f=1MHz; TJ=25°C		17		μJ
Turn off switching energy	E _{OFF}	VGS=-5/15V; VDS=200V; f=1MHz; TJ=25°C		6		μJ
Rise time	t _R	VGS=-5/15V; VDS=1kV; ID=10A; RG=0Ω; TJ=25°C		20		ns
Fall time	t _F	VGS=-5/15V; VDS=1kV; ID=10A; RG=0Ω; TJ=25°C		15		ns
Turn off delay time	t _D	VGS=-5/15V; VDS=200V; ID=10A; RG=0Ω; TJ=25°C		10		ns
Gate Charge	Q _G	VGS=-5/15V; VDS=200V; ID=10A; RG=0Ω; TJ=25°C		10		nC
Internal gate resistance	R _G	f=1Mz; VAC=25mV; TJ=25°C		5		Ω
Thermal resistance:Junction to Case	R _{JC}			1.5		°C/W



Body diode characteristics							
*Characteristics	Symbol	Comments	Min	Typ	Max	Units	
Diode forward voltage	VF	IF=3A; VGS=0V TJ=25°C IF=3A; VGS=0V TJ=175°C		2.9 2.48		V	
Pulsed diode current	ISpulsed	VGS=0V; VDS=-3V; TJ=25°C VGS=0V; VDS=-3V; TJ=175°C		4 3		A	
Reverse recovery time	trr			2		ns	
Reverse recovery charge	Qrr	VDS=0-200V; VGS=0V; T=25°C		47		nC	

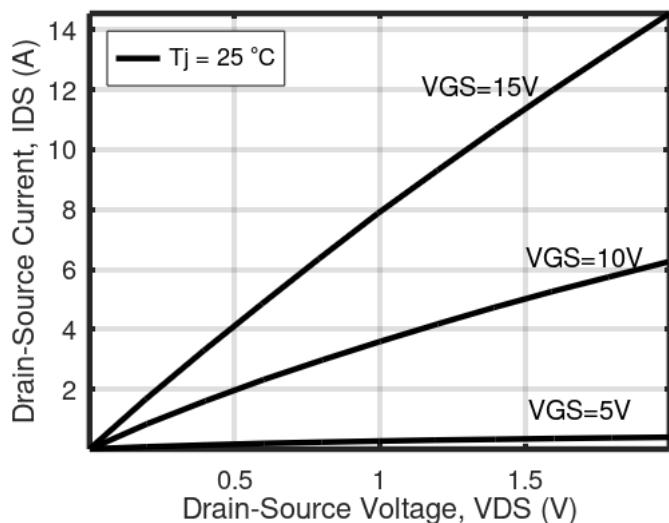
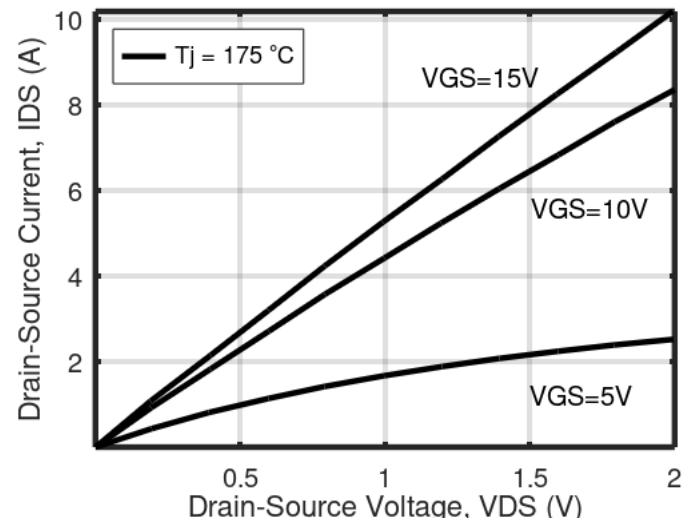
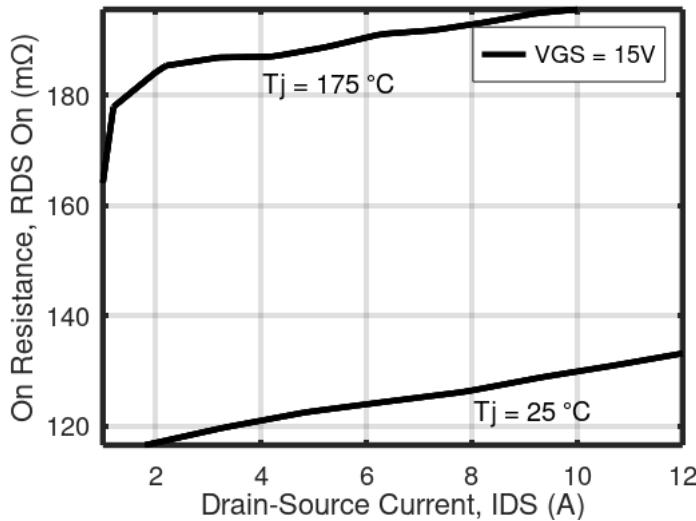
Figure 1: Output Characteristics $T_J = 25 \text{ } ^\circ\text{C}$ Figure 2: Output Characteristics $T_J = 175 \text{ } ^\circ\text{C}$ 

Figure 3: On-Resistance vs. Drain Current For Various Temperatures.

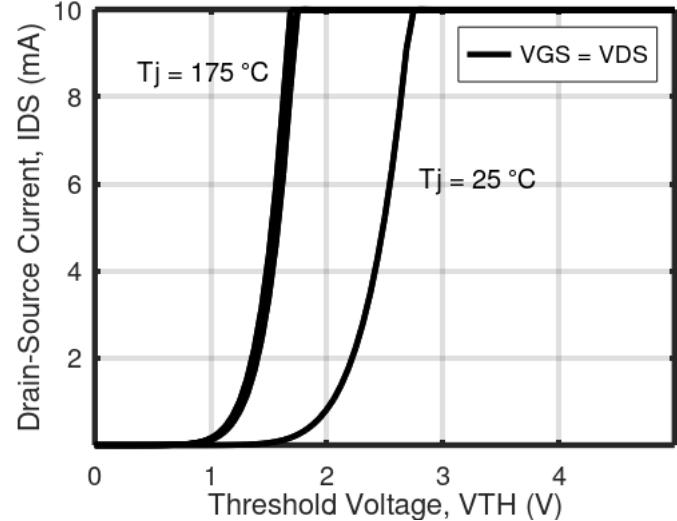


Figure 4: Drain Current vs. Threshold Voltage For Various Temperatures



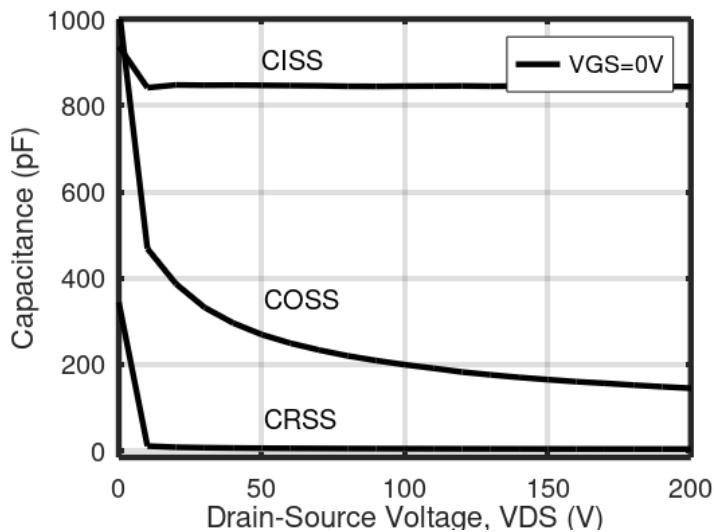


Figure 5: Capacitances vs. Drain-Source Voltage (0 - 200V)

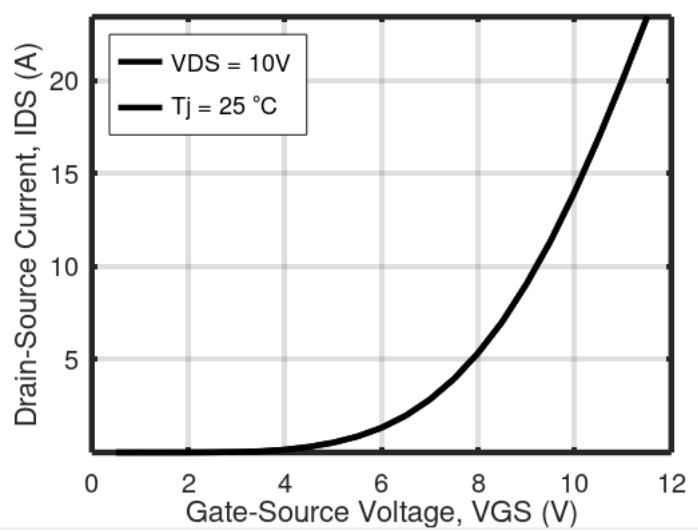


Figure 6: Transfer Characteristic

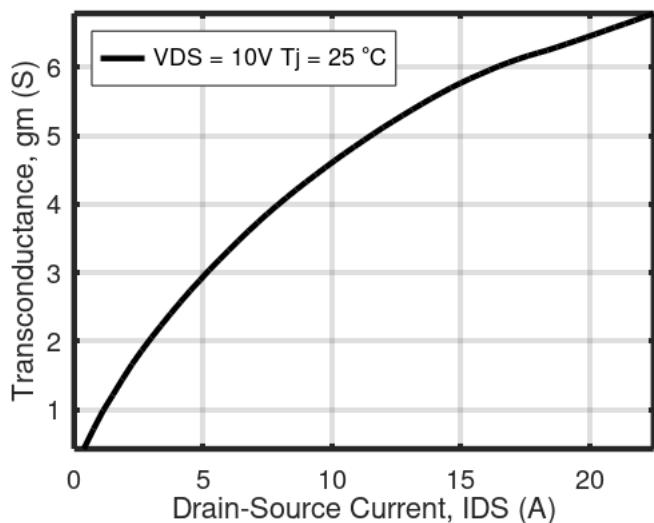


Figure 7: Transconductance vs. Drain Current

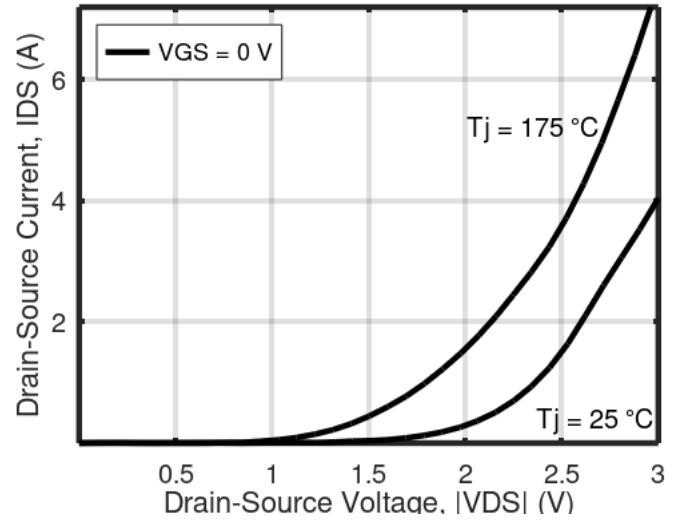


Figure 8: Body Diode Characteristic For Various Temperatures

CAUTION: These devices are ESD sensitive. Use proper handling procedures.

Disclaimer: These specifications may not be considered as a guarantee of components characteristics. Components have to be tested depending on intended application as adjustments may be necessary. The use of CoolCAD Electronics components in life support appliances and systems are subject to written approval of CoolCAD Electronics.

